

1

2

3

Set-up

1. Insert your Bye Bye Standby socket into an electrical mains socket.
2. Each socket must be set-up with a remote before it can be used. To set-up your socket with your remote control press and hold the **OFF** button on the socket. The LED on the socket will flash once every second indicating that it is ready to be set-up.
3. Choose one pair of buttons on your remote control to control your socket. Press and hold the green **ON** button on your remote control, the LED will flash rapidly and then remain on, this indicates that your socket is ready to be used.



Technical Specifications

Voltage: 240VAC/50Hz
 Rating: Max 13A/3000W
 On/Off Indication: LED
 Range: <30M
 Battery Type: 12VDC/MN21

Important

For indoor use only. Keep away from all sources of water and moisture. Do not overload. Adult Installation only. Use only as directed. Always check wattage load and do not exceed the electrical devices specification

Bye Bye Standby is a trading name of Enistic Ltd
 10 Wornal Park, Worminghall Bucks, HP18 9PH
www.enistic.com
 For further information on the Bye Bye Standby range of energy saving products, please visit www.ByeByeStandby.co.uk

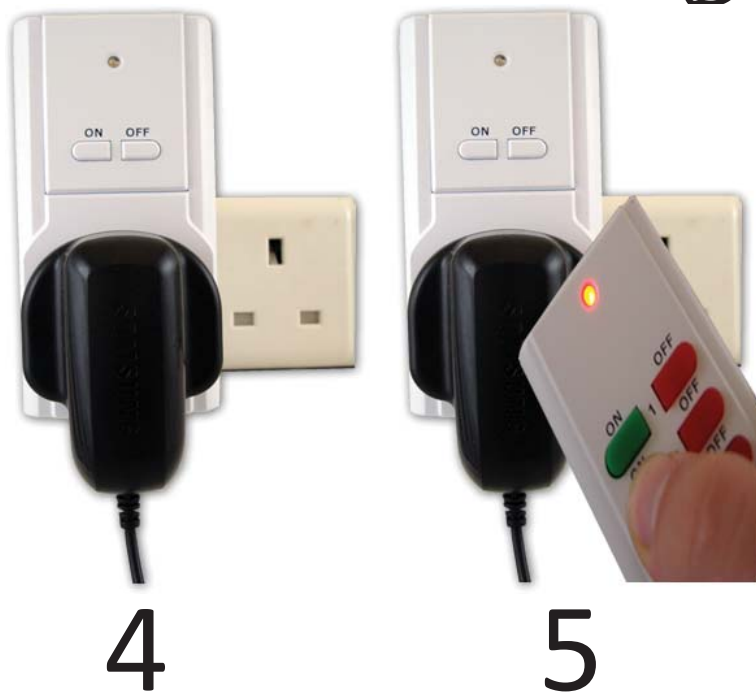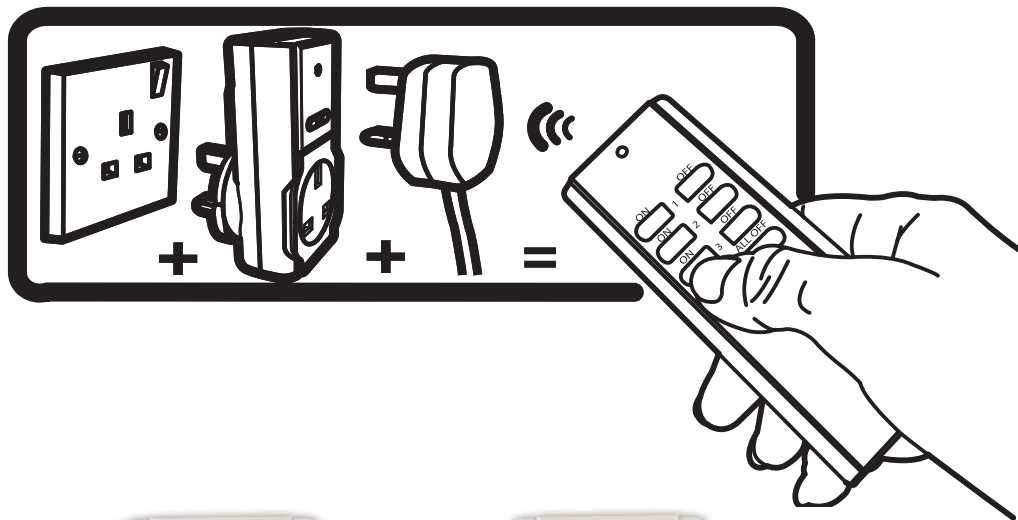

To Use

Before you can use your socket, you must set it up. See overleaf for details.

4. To use, plug the device that you would like to control into your Bye Bye Standby socket and press the green button to activate standby mode and the red button to take your appliance off standby.
5. If you press the **ALL ON** button on your remote control all your sockets will be turned on, if you press the **All Off** Button all of your sockets will be turned off.

Resetting The Socket

1. Ensure your Bye Bye Standby socket is turned off, hold down the off button on your remote control for three seconds.
2. Hold down the **ALL OFF** button on the remote control until the LED on the socket flashes rapidly and then once every second.

Tips

To control your Bye Bye Standby socket with an additional remote control:

1. Each socket can be controlled by more than one remote control, including remote controls from the Bye Bye Standby classic range.
2. To use your new Bye Bye Standby socket with a Bye Bye Standby classic remote control simply follow the set-up instructions overleaf using A1 on your Bye Bye Standby classic remote control or any other code you wish to set.

Troubleshooting

If your socket doesn't respond to the remote control:

1. The battery in your remote control may have lost charge, consider changing the battery.
2. The socket and remote are too far apart, move closer to the socket.